

MARTIN® SH 75 Sonic Horn




The [MARTIN® SH 75 Sonic Horn](#) produces 147 dB at one meter with a frequency of 75 Hz.

SPECIFICATIONS

Fundamental Frequency (Hertz)	75 Hz		
Outout Power Level (Decibels)	147 dB		
Material*	Section A	Section B	Section C
	Cast Ductile Iron	Cast Ductile Iron	Cast Ductile Iron
	Stainless Steel	Stainless Steel	Stainless Steel
Diaphragm Material	Titanium		
Max Operating Temperature	1200° F (649° C)		
Weight	190 lbs (86.2 kg)		
Air Consumption	80 SCFM @ 80 PSI (38 l/s @ 6.21 bar)		

*Sonic Horn can be any combination of listed materials.
Cast Ductile Iron is ASTM A-240. Stainless Steel is ASTM A-395 60-40-18.

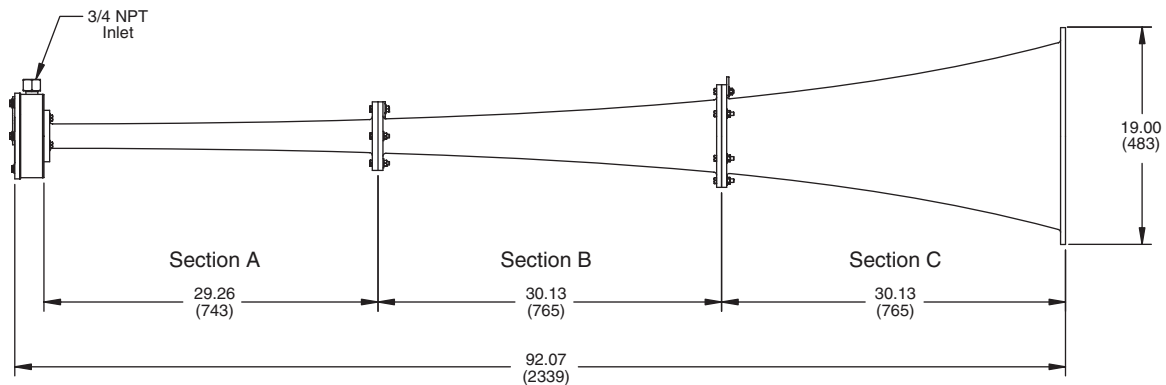

Martin Engineering USA
One Martin Place
Neponset, IL 61345-9766 USA
800 544 2947 or 309 852 2384
Fax 800 814 1553
www.martin-eng.com

Subject to change without prior notice.
Quality Management System Certified by DNV - ISO 9001

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO 9001:2008 ==